

Dopsleutel 1/2"

190/1 6p



Profielen








Standaard



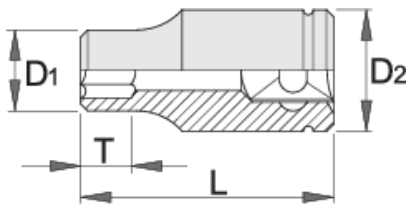

ISO 2725-1

Product attributen

- materiaal: premium flex chroom vanadium staal
- drop forged, entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009
- gepolijst
- made according to standard ISO 2725-1 (only metric dimension)
- made according to standard DIN 3124



		L	D1	D2	T↑		
605307	8	38	13.2	22.9	12	55	
610155	9	38	13.9	22.9	12	55	
600851	10	38	15	22.9	12	45	
600852	11	38	16.3	22.9	12	49	
600853	12	38	17.9	22.9	12	49	
600854	13	38	18.8	22.9	12	50	
600855	14	38	19.7	22.9	12	53	
600856	15	38	20.4	22.9	12	58	
600857	16	38	22.9	21.5	12	57	
600858	17	38	24.3	22	12	62	
600859	18	38	25.5	23	12	70	
600860	19	38	26.8	24	14	63	
600861	20	38	28.1	24	14	76	
600862	21	38	29.3	25	14	95	
600863	22	38	30.4	25	14	95	
600864	23	40	31.7	26	14	114	
600865	24	42	33.1	28	16	165	
600866	25	42	34.2	29	16	126	
600867	26	42	35.3	30	16	147	
600868	27	43	37	30	18	150	
600869	28	43	38	31	20	177	
600871	30	46	40.7	34	22	210	
600872	32	46	43.2	36	22	222	
610105	5/16"	38	13.2	21.8	12	55	
610106	3/8"	38	15	22.9	12	55	
610107	7/16"	38	16.3	21.8	12	55	

		L	D1	D2	T↑		
610108	1/2"	38	18.8	22.9	12	65	
610109	9/16"	38	20.4	22.9	12	65	
610111	11/16"	38	25.5	23	12	95	
610112	3/4"	38	26.8	24	14	105	
610114	7/8"	40	29.85	26	14	142	
610115	15/16"	42	33.1	28	16	165	
610118	1.1/8"	43	39	32	20	185	
610119	1.3/16"	46	40.7	34	22	237	

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Veelgestelde vragen

I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?

When working with pneumatic screwdrivers, you must use an impact socket wrench.