Lokma 1/2"

190/1 6p




Profiles

Standards

ISO 2725-1

Product features

- malzeme: krom molibden
- sıcak dövme, tamamen sertleştirilmiş ve temperlenmiş
- yüzey bitirme: ISO 1456:2009 standardına göre krom kaplamalı
- cilalı
- ISO 2725-1 standardına göre yapılmıştır (yalnızca metrik boyut)
- DIN 3124 standardına göre yapılmıştır

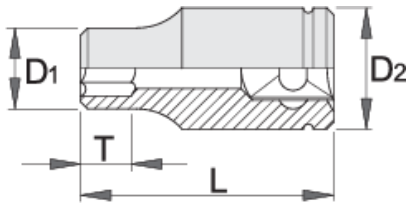

	mm	L	D1	D2	T	
605307	8	38	13.2	22.9	12	55
610155	9	38	13.9	22.9	12	55
600851	10	38	15	22.9	12	45
600852	11	38	16.3	22.9	12	49
600853	12	38	17.9	22.9	12	49
600854	13	38	18.8	22.9	12	50
600855	14	38	19.7	22.9	12	53
600856	15	38	20.4	22.9	12	58
600857	16	38	22.9	21.5	12	57
600858	17	38	24.3	22	12	62
600859	18	38	25.5	23	12	70
600860	19	38	26.8	24	14	63
600861	20	38	28.1	24	14	76
600862	21	38	29.3	25	14	95
600863	22	38	30.4	25	14	95
600864	23	40	31.7	26	14	114
600865	24	42	33.1	28	16	165
600866	25	42	34.2	29	16	126
600867	26	42	35.3	30	16	147
600868	27	43	37	30	18	150
600869	28	43	38	31	20	177
600871	30	46	40.7	34	22	210
600872	32	46	43.2	36	22	222
610105	5/16"	38	13.2	21.8	12	55
610106	3/8"	38	15	22.9	12	55
610107	7/16"	38	16.3	21.8	12	55

		L	D1	D2		
610108	1/2"	38	18.8	22.9	12	65
610109	9/16"	38	20.4	22.9	12	65
610111	11/16"	38	25.5	23	12	95
610112	3/4"	38	26.8	24	14	105
610114	7/8"	40	29.85	26	14	142
610115	15/16"	42	33.1	28	16	165

* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindendir.

Related products

 Lokma 1/2", uzun tip, 12 noktalı

 Darbeli lokma 1/2"

Frequently asked questions

I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?
When working with pneumatic screwdrivers, you must use an impact socket wrench.