

# Ključ nasadni 1/2", 12-kutni

190/1 12p



## Profili




## Standardi

ISO 2725-1

## Atributi proizvoda

- materijal: krom-vanadij
- kovan, u cijelosti ojačan i zakaljen
- kromiran (ISO 1456:2009)
- poliran
- izrađen prema standardu ISO 2725-1 (samo metričke dimenzije)

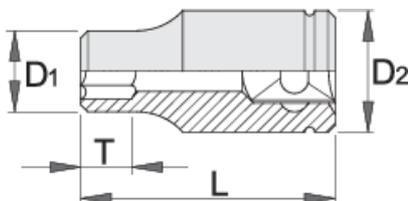

|  |  | D1   | D2   | L  | T↑ |  |  |
|---|--|------|------|----|----|--|--|
| 603812  | 10   | 15   | 22.9 | 38 | 12 | 55   |  |
| 603814  | 12   | 17.9 | 22.9 | 38 | 12 | 65   |  |
| 603815  | 13   | 18.8 | 22.9 | 38 | 12 | 65   |  |
| 603816  | 14   | 19.7 | 22.9 | 38 | 12 | 65   |  |
| 603817  | 15   | 20.4 | 22.9 | 38 | 12 | 65   |  |
| 603818  | 16   | 22.9 | 21.5 | 38 | 12 | 65   |  |
| 603819  | 17   | 24.3 | 22   | 38 | 12 | 59   |  |
| 603820  | 18   | 25.5 | 23   | 38 | 12 | 100  |  |
| 603821  | 19   | 26.8 | 24   | 38 | 14 | 60   |  |
| 603823  | 21   | 29.3 | 25   | 38 | 14 | 128  |  |
| 603824  | 22   | 30.4 | 25   | 38 | 14 | 142  |  |
| 603826  | 24   | 33.1 | 28   | 42 | 16 | 110  |  |
| 603827  | 27   | 37   | 30   | 43 | 18 | 180  |  |
| 603828  | 30   | 40.7 | 34   | 46 | 22 | 195  |  |
| 603829  | 32   | 43.2 | 36   | 46 | 22 | 237  |  |
| 621722  | 36   | 47,9 | 37,8 | 46 | 22 | 245  |  |
| 609368  | 1/2"   | 18.8 | 21,8 | 38 | 12 | 65   |  |
| 609369  | 9/16"  | 20.4 | 21,8 | 38 | 12 | 65   |  |
| 609372  | 11/16"   | 23,9 | 22   | 38 | 12 | 65   |  |
| 609373  | 3/4"   | 25,9 | 23   | 38 | 14 | 105  |  |
| 609375  | 13/16"   | 27,9 | 25   | 38 | 14 | 128  |  |
| 609376  | 7/8"   | 29,9 | 26   | 40 | 14 | 142  |  |
| 609377  | 15/16"   | 31,9 | 28   | 42 | 16 | 165  |  |
| 609378  | 1"   | 33,9 | 30   | 42 | 16 | 170  |  |
| 609380  | 1.1/8"   | 37,9 | 32   | 43 | 20 | 190  |  |
| 609382  | 1.1/4"   | 41,9 | 36   | 46 | 22 | 237  |  |

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Safety (pictures)



## Frequently asked questions

**I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?**

When working with pneumatic screwdrivers, you must use an impact socket wrench.