

1/2" 套筒，12方

190/1 12p



配置文件




标准

ISO 2725 - 1

产品属性

- 材料:优质铬钒钢
- 滴锻造，完全硬化和回火
- 表面处理:按ISO 1456:2009镀铬
- 抛光
- 根据ISO2725-1标准生产（只限公制规格）

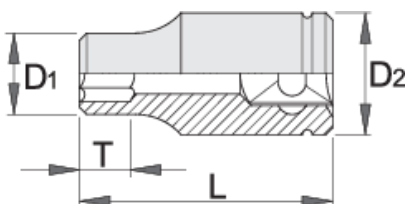



D1

D2

L




| | | | | | | |
|--------|--------|------|------|----|----|-----|
| 603812 | 10 | 15 | 22.9 | 38 | 12 | 55 |
| 603813 | 11 | 16.3 | 22.9 | 38 | 12 | 55 |
| 603814 | 12 | 17.9 | 22.9 | 38 | 12 | 65 |
| 603815 | 13 | 18.8 | 22.9 | 38 | 12 | 65 |
| 603816 | 14 | 19.7 | 22.9 | 38 | 12 | 65 |
| 603817 | 15 | 20.4 | 22.9 | 38 | 12 | 65 |
| 603818 | 16 | 22.9 | 21.5 | 38 | 12 | 65 |
| 603819 | 17 | 24.3 | 22 | 38 | 12 | 65 |
| 603820 | 18 | 25.5 | 23 | 38 | 12 | 100 |
| 603821 | 19 | 26.8 | 24 | 38 | 14 | 105 |
| 603822 | 20 | 28.1 | 24 | 38 | 14 | 115 |
| 603823 | 21 | 29.3 | 25 | 38 | 14 | 128 |
| 603824 | 22 | 30.4 | 25 | 38 | 14 | 142 |
| 603825 | 23 | 31.7 | 26 | 40 | 14 | 147 |
| 603826 | 24 | 33.1 | 28 | 42 | 16 | 165 |
| 603827 | 27 | 37 | 30 | 43 | 18 | 180 |
| 603828 | 30 | 40.7 | 34 | 46 | 22 | 195 |
| 603829 | 32 | 43.2 | 36 | 46 | 22 | 237 |
| 621722 | 36 | 47,9 | 37,8 | 46 | 22 | 245 |
| 609366 | 3/8" | 15 | 21,8 | 38 | 12 | 55 |
| 609367 | 7/16" | 16.3 | 21,8 | 38 | 12 | 55 |
| 609368 | 1/2" | 18.8 | 21,8 | 38 | 12 | 65 |
| 609369 | 9/16" | 20.4 | 21,8 | 38 | 12 | 65 |
| 609370 | 19/32" | 21,7 | 20.7 | 38 | 12 | 65 |
| 609371 | 5/8" | 22.9 | 21.5 | 38 | 12 | 65 |
| 609372 | 11/16" | 23,9 | 22 | 38 | 12 | 65 |
| 609373 | 3/4" | 25,9 | 23 | 38 | 14 | 105 |
| 609374 | 25/32" | 27.9 | 24 | 38 | 14 | 115 |
| 609375 | 13/16" | 27,9 | 25 | 38 | 14 | 128 |

|  |  | D1 | D2 | L |  |  |
|---|--|------|----|----|--|--|
| 609376 | 7/8" | 29,9 | 26 | 40 | 14 | 142 |
| 609377 | 15/16" | 31,9 | 28 | 42 | 16 | 165 |
| 609378 | 1" | 33,9 | 30 | 42 | 16 | 170 |
| 609379 | 1.1/16" | 35,9 | 30 | 43 | 18 | 180 |
| 609380 | 1.1/8" | 37,9 | 32 | 43 | 20 | 190 |
| 609381 | 1.3/16" | 39,9 | 34 | 46 | 22 | 195 |
| 609382 | 1.1/4" | 41,9 | 36 | 46 | 22 | 237 |

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Safety (pictures)

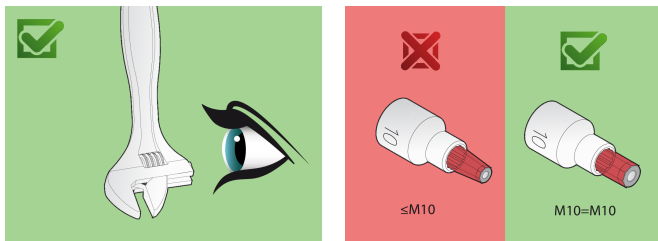

Frequently asked questions

I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?

When working with pneumatic screwdrivers, you must use an impact socket wrench.