Ciocan pneumatic reversibil 1.1/2"

1596



Profile



Caracteristicile produsului

- viteza de rotatie 3000 rot/min
- moment de torsiune max. 3388 Nm
- Presiunea maxima de aer comprimat:6, 2 Bar
- consum de aer comprimat 410 l/min
- Racord de aer 1/2"
- dimensiunea maxima a surubului (piulitei) M 45

Avantaje

- moment de torsiune controlat
- insurubare rapida
- o diversitate de utilizari


Utilizare

- industria auto
- industria aerospatiala

- echipament agricol
- industria grea
- constructia de masini
- industria de constructii navale
- montari individuale

Important

- Folositi intotdeauna capetele chei tubulare de impact UNIOR

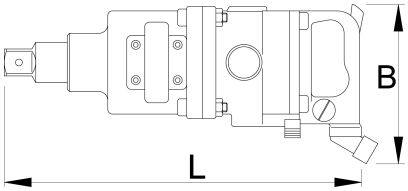

		B	L	Nm	
617690	1.1/2"	550	450	3388	17800

* Imaginea produsului este simbolica.Toate dimensiunile sunt exprimate în mm,greutatea în grame.

Accessories


Cuplaj, partea tata


Cuplaj, partea mama


Filtru regulator si gresor pneumatic 3/4"


Furtun pneumatic elicoidal

Safety tips

● The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.

● Regularly clean and dry the air filters and inlet air supply.

● Always disconnect tools not in use from the air supply.

● Always use clean and dry air with the correct mixture of oil, for maximum tool life.

● Check the joints and ensure that the tubes and other equipment are not damaged before use.

● All tools should be gently oiled prior to being stored.

● Always store pneumatic tools in dry places away from water.

● Always use original spare parts.

● Repairs can be performed only by authorised staff people authorised by Unior d.d.