

# Pnömatik değişken uçlu çekiç 1.1/2"

1597



## Profiles



## Product features

- serbest hız dakikada 3000 devir
- maks. Tork 4065 Nm
- maksimum hava basıncı: 6,2 Bar
- hava tüketimi 435 l/dk
- hava girişi 1/2"
- maks. cıvata boyu M52

## Avantajları:

- kontrollü tork
- hızlı vidalama
- geniş çeşitlilikte kullanım


## Kullanım:

- araba sanayi
- uçak sanayi

- tarım ekipmanı
- ağır sanayi
- büyük inşaat makineleri
- gemi inşaat sanayisi
- bireysel montaj

## Önemli!

- Her zaman Unior DARBELİ lokmalarını kullanın.

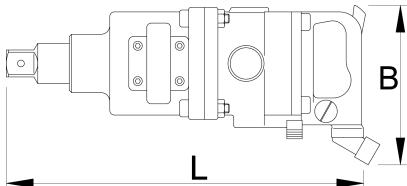

		B	L		
--	--	---	---	--	--

617691

1.1/2"

545

465

4065

18600

\* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindendir.

## Accessories



Bağlantı elemanı, erkek parça



Bağlantı elemanı, dişi parça



Pnömatik filtre düzenleme ve yağlama aleti 3/4"



Spiral pnömatik hortum

## Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.



- Always disconnect tools not in use from the air supply.

- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.