

Pneumatic sander

1510



Profielen



Product attributen

- free speed 10000 revolution per minutes
- maximum air pressure : 6,2 Bar
- air consumption 212 l/min
- air inlet 1/4"
- Velcro sander pad


Voordelen:



- the ergonomic shape of the handle enables good grip and prevents gliding
- suitable for lefthanders as well as for right-handers
- silent and powerful drive
- handy on/off switch
- exhaustion of parts into a bag for a cleaner workplace
- flexible and robust pipe for cleaning dust

- it does not leave edges on the working platform
- better work conditions due to minimal vibrations
- extreme power based on its weight (1.2 kg)

Gebruik:

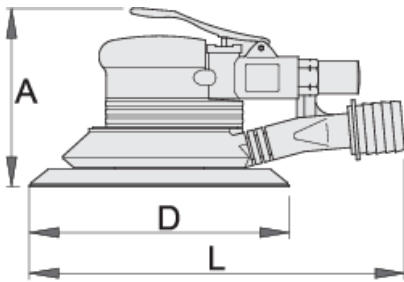- vehicle workshops
- preparation of different working platforms for further process
- ideal for grinding construction steel, metals and wood
- The basis of sander is VELCRO™ system which is: quick, simple and safe to mount and unmount various sander pads. This system is being used for various occasions - the best known example is training shoes with VELCRO™ fastening.



	Nº	L	A	D	
617733	2.5	220	105	150	1600
617713	5	220	105	150	1615

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm, en het gewicht in grammen. Alle vermelde afmetingen kunnen variëren in tolerantie.

Gebruik (Afbeeldingen)

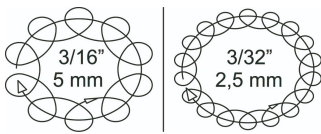


Foto (Afbeeldingen)



Accessoires



Coupling, male part



Coupling, male part



Coupling, female part



Coupling, female part



Pneumatic filter regulator and lubricator 3/8"



Pneumatic filter regulator and lubricator 1/2"



Spiral pneumatic hose

Veiligheidstips



- De druk in het gereedschap tijdens de bewerking moet ten minste 6,2 bar bedragen om het gereedschap goed te laten werken.
- Maak de luchtfilters en de inlaatluchttoevoer regelmatig schoon en droog.
- Gebruik altijd schone en droge lucht met het juiste oliemengsel, voor een maximale levensduur van het gereedschap.
- Controleer de verbindingen en zorg ervoor dat de buizen en andere apparatuur niet beschadigd



- Koppel gereedschap dat niet wordt gebruikt altijd los van de luchttoevoer.

zijn vóór gebruik.

- Al het gereedschap moet voorzichtig worden geolied voordat het wordt opgeborgen.
- Bewaar pneumatisch gereedschap altijd op een droge plaats, uit de buurt van water.
- Gebruik altijd originele reserveonderdelen.
- Reparaties mogen alleen worden uitgevoerd door bevoegd personeel dat door Unior d.d. is geautoriseerd.