

# Pneumatic sander

1510



## Profielen



## Product attributen

- free speed 10000 revolution per minutes
- maximum air pressure : 6,2 Bar
- air consumption 212 l/min
- air inlet 1/4"
- Velcro sander pad


## Voordelen:



- the ergonomic shape of the handle enables good grip and prevents gliding
- suitable for lefthanders as well as for right-handers
- silent and powerful drive
- handy on/off switch
- exhaustion of parts into a bag for a cleaner workplace
- flexible and robust pipe for cleaning dust

- it does not leave edges on the working platform
- better work conditions due to minimal vibrations
- extreme power based on its weight (1.2 kg)

#### Gebruik:

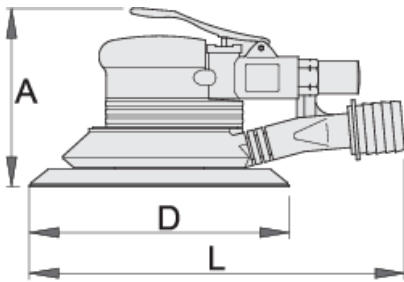
- vehicle workshops
- preparation of different working platforms for further process
- ideal for grinding construction steel, metals and wood
- The basis of sander is VELCRO™ system which is: quick, simple and safe to mount and unmount various sander pads. This system is being used for various occasions - the best known example is training shoes with VELCRO™ fastening.



	Nº	L	A	D	
617733	2.5	220	105	150	1600
617713	5	220	105	150	1615

\* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm, en het gewicht in grammen. Alle vermelde afmetingen kunnen variëren in tolerantie.

#### Gebruik (Afbeeldingen)

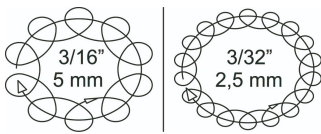

#### Foto (Afbeeldingen)



## Accessoires



Coupling, male part



Coupling, male part



Coupling, female part



Coupling, female part



Pneumatic filter regulator and lubricator 3/8"



Pneumatic filter regulator and lubricator 1/2"



Spiral pneumatic hose

## Veiligheidstips



- De druk in het gereedschap tijdens de bewerking moet ten minste 6,2 bar bedragen om het gereedschap goed te laten werken.
- Maak de luchtfilters en de inlaatluchtoevoer regelmatig schoon en droog.
- Gebruik altijd schone en droge lucht met het juiste oliemengsel, voor een maximale levensduur van het gereedschap.
- Controleer de verbindingen en zorg ervoor dat de buizen en andere apparatuur niet beschadigd



- Koppel gereedschap dat niet wordt gebruikt altijd los van de luchttoevoer.

zijn vóór gebruik.

- Al het gereedschap moet voorzichtig worden geolied voordat het wordt opgeborgen.
- Bewaar pneumatisch gereedschap altijd op een droge plaats, uit de buurt van water.
- Gebruik altijd originele reserveonderdelen.
- Reparaties mogen alleen worden uitgevoerd door bevoegd personeel dat door Unior d.d. is geautoriseerd.