Stroke pneumatic hammer

1514



Profiles

Product features


- used for cutting sheet, bolts and removing welding slag, rivets, plaster and tiles
- with spring, quick change retainer as spare parts
- piston stroke length: 170 - 67mm, 225 - 92mm
- bore diameter 9,1mm
- stroke per minute: 170 - 3000, 225 - 2100
- air consumption 250 l/min
- air inlet 1/4"

Advantages:

- light and compact tool, used also in small rooms
- wide range of use
- change retainer

Usage:

- car industry
- cutting of sheet metal and screws
- removal of welds
- working on walls, concrete, stones, bricks, steel, light metals

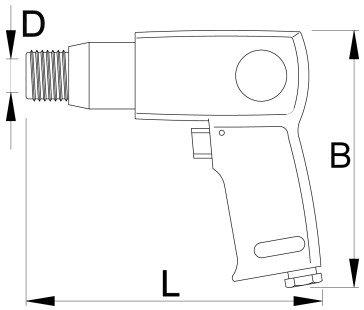

	L	B	D	
617714	170	150	19	1810
617715	225	150	19	2160

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

Usage (pictures)





Photo (pictures)



Accessories



Spring for 1514

 Quick change retainer for 1514

 Flat chisel

 Pointed chisel

 Rivet and welding slag chisel

 Coupling, male part

 Coupling, male part

 Coupling, female part

 Coupling, female part

 Pneumatic filter regulator and lubricator 3/8"

 Pneumatic filter regulator and lubricator 1/2"

 Spiral pneumatic hose

Safety tips



● The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.

● Regularly clean and dry the air filters and inlet air supply.

● Always use clean and dry air with the correct mixture of oil, for maximum tool life.

● Check the joints and ensure that the tubes and other equipment are not damaged before use.

● All tools should be gently oiled prior to being stored.

● Always store pneumatic tools in dry places away from water.



● Always disconnect tools not in use from the air supply.

- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.