Čekić pneumatski

1514



Profili

Atributi proizvoda

- pogodan za sječenje lima, vijaka, skidanje varova, betona i keramike
- u kompletu sa oprugom i brzosteznom glavom
- dužina glave: kod dim. 170 - 67 mm, kod dim. 225 - 92 mm
- dužina udarca: 9,1 mm
- broj udaraca: kod dim. 170 - 3000/min, kod dim. 225 - 2100/min
- potrošnja zraka: 250 l/min
- priključak za zrak: 1/4"

Prednosti:

- lak i kompaktan alat, pogodan za ograničen prostor
- širok spektar upotrebe
- promjenjiva glava

Upotreba:

- automobilska industrija
- rezanje limova i vijaka
- za odstranjivanje varova
- za rad na zidovima, betonu, kamenu, cigli, čeliku, lakim metalima

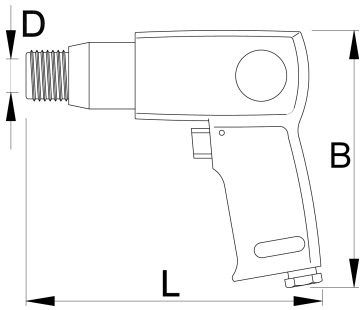

	L	B	D	
617714	170	150	19	1810
617715	225	150	19	2160

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Upotreba (pictures)




Photo (pictures)



Accessories


Opruga za art. 1514

 Glava brzostezna za art. 1514

 Sjekač plosnati

 Špica

 Sjekač za varove

 Spojnica muška

 Spojnica muška

 Spojnica ženska

 Spojnica ženska

 Pripremna grupa 3/8"

 Pripremna grupa 1/2"

 Crijevo spiralno za zrak

Safety tips



● The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.

● Regularly clean and dry the air filters and inlet air supply.

● Always use clean and dry air with the correct mixture of oil, for maximum tool life.

● Check the joints and ensure that the tubes and other equipment are not damaged before use.

● All tools should be gently oiled prior to being stored.

● Always store pneumatic tools in dry places away from water.



● Always disconnect tools not in use from the air supply.

- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.