

# 敲击气动锤

1514



## 配置文件



## 产品属性

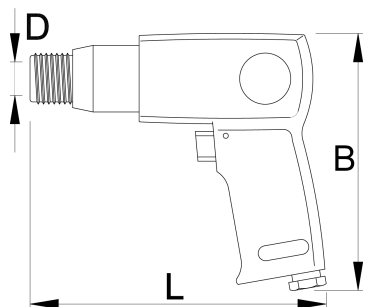
- 用于切割薄片、螺栓和移除焊渣、铆钉、灰泥和瓷砖。
- 带弹簧的快速更换制动装置配件
- 活塞敲击杆长度：170 - 67mm，225 - 92mm
- 孔径9.1mm
- 每分钟敲击：170 - 3000，225 - 2100
- 空气消耗量250 升/分钟
- 1/4"进气口



## 优势：

- 轻型紧凑工具，适用于小空间
- 应用范围广泛
- 更换制动装置

## 用途：

- 汽车业
- 金属薄片和螺钉切割
- 焊件移除
- 用于墙壁、混凝土、石料、砖块、钢铁、轻金属。



	L	B	D	
617714	170	150	19	1810
617715	225	150	19	2160

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## 用途 (pictures)



## Photo (pictures)



## Accessories



1514弹簧



1514快速更换制动装置



平凿



尖凿



铆钉和焊渣凿



薄片切割凿



V型刃凿



铲凿



气动管接头



气动管接头



气动管接头



气动管接头



3/8"气动过滤调节器和润滑器



1/2"气动过滤调节器和润滑器



螺旋气动软管

## Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.



- Always disconnect tools not in use from the air supply.

- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.