

敲击气动锤

1514



配置文件



产品属性

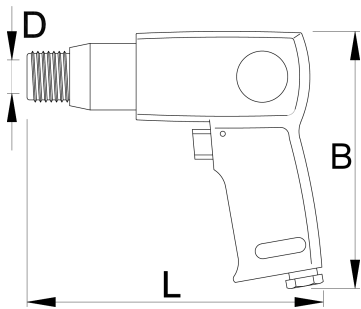
- 用于切割薄片、螺栓和移除焊渣、铆钉、灰泥和瓷砖。
- 带弹簧的快速更换制动装置配件
- 活塞敲击杆长度：170 - 67mm，225 - 92mm
- 孔径9.1mm
- 每分钟敲击：170 - 3000，225 - 2100
- 空气消耗量250 升/分钟
- 1/4"进气口



优势：

- 轻型紧凑工具，适用于小空间
- 应用范围广泛
- 更换制动装置

用途：

- 汽车业
- 金属薄片和螺钉切割
- 焊件移除
- 用于墙壁、混凝土、石料、砖块、钢铁、轻金属。



	L	B	D	
617714	170	150	19	1810
617715	225	150	19	2160

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

用途 (pictures)



Photo (pictures)



Accessories



1514弹簧



1514快速更换制动装置



平凿



尖凿



铆钉和焊渣凿



薄片切割凿



V型刃凿



铲凿



气动管接头



气动管接头



气动管接头



气动管接头



3/8"气动过滤调节器和润滑器



1/2"气动过滤调节器和润滑器



螺旋气动软管

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.



- Always disconnect tools not in use from the air supply.

- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.