

# Čekić pneumatski

1514



## Profili



## Atributi proizvoda

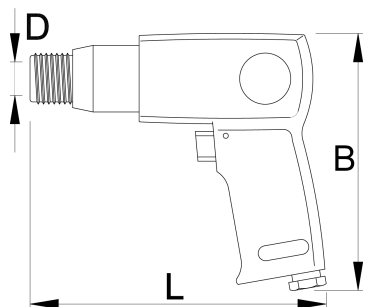
- pogodan za sječenje lima, vijaka, skidanje varova, betona i keramike
- u kompletu sa oprugom i brzosteznom glavom
- dužina glave: kod dim. 170 - 67 mm, kod dim. 225 - 92 mm
- dužina udarca: 9,1 mm
- broj udaraca: kod dim. 170 - 3000/min, kod dim. 225 - 2100/min
- Potrošnja zraka: 250 l/min
- Priključak za zrak: 1/4"



## Prednosti:

- Lak i kompaktan alat, pogodan za ograničen prostor
- Širok spektar upotrebe
- Promjenjiva glava

## Upotreba

- Automobilaska industrija
- Rezanje limova i vijaka
- Za odstranjivanje varova
- Za rad na zidovima, betonu, kamenu, cigli, čeliku, lakim metalima



	L	B	D	
617714	170	150	19	1810
617715	225	150	19	2160

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

### upotreba (pictures)



### Photo (pictures)



### Accessories



Opruga za art. 1514



Glava brzostezna za art. 1514



Sjekač plosnati



Špica



Sjekač za varove



Sjekač za lim s rascjepom



Sjekač za lim s rascjepom



Sjekač široki



Spojnicica muška



Spojnicica muška



Spojnicica ženska



Spojnicica ženska



Priprema grupa 3/8"



Priprema grupa 1/2"



Cijev spiralna za zrak

## Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.



- Always disconnect tools not in use from the air supply.

- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.