

Pneumatische beitelhamer

1514



Profielen



Product attributen

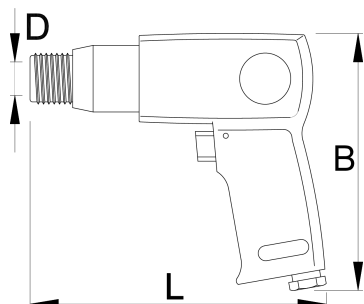
- used for cutting sheet, bolts and removing welding slag, rivets, plaster and tiles
- with spring, quick change retainer as spare parts
- piston stroke length: 170 - 67mm, 225 - 92mm
- bore diameter 9,1mm
- stroke per minute: 170 - 3000, 225 - 2100
- air consumption 250 l/min
- air inlet 1/4"



Voordelen:

- light and compact tool, used also in small rooms
- wide range of use
- change retainer

Gebruik:

- car industry
- cutting of sheet metal and screws
- removal of welds
- working on walls, concrete, stones, bricks, steel, light metals



	L	B	D	
617714	170	150	19	1810
617715	225	150	19	2160

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Gebruik (Afbeeldingen)



Foto (Afbeeldingen)



Accessoires



Veer voor 1514



Snelwisselhouder voor 1514



Koudbeitel, plat-ovaal



Puntbeitel, 8-kantig



Snij- en lasbeitel



Plaatwerkbeitel



V-groef beitel



Voegbeitel



Koppeling, man



Koppeling, man



Koppeling, vrouw



Koppeling, vrouw



Pneumatische filterdrukregelaar en olieverniveelaar 3/8"



Pneumatische filterdrukregelaar en olieverniveelaar 1/2"



Spiraalslang

Veiligheidstips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.



- Always disconnect tools not in use from the air supply.

- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.