

# Bušilica pneumatska s ručkom

1515H



## Profili




## Atributi proizvoda

- dvosmjerna
- 800 o/min u slobodnom hodu
- max. pritisak zraka: 6, 2 bara
- potrošnja zraka: 113 l/min
- priključak za zrak: 1/4"
- kapacitet glave: 1,5-13 mm
- navoj glave 3/8", 24 UNF
- unutarnji promjer cijevi: 10 mm

## Prednosti:

- izuzetna snaga
- lagan, kompaktan alat kojim se jednostavno rukuje

- podesiva drška za bolji prihvat
- praktično pozicioniran prekidač
- ergonomski oblikovana drška za rad bez napora
- plastična zaštita drške za ublažavanje vibracija
- okretanje u oba smjera (lijevo/desno)
- brzostezna glava

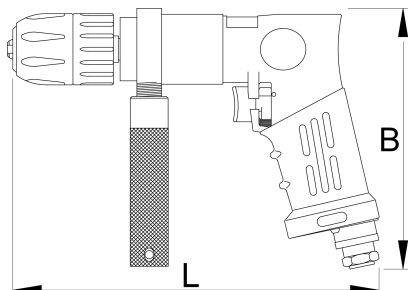

617727

L

220

B

150



1570

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

## Upotreba (pictures)



## Photo (pictures)



## Accessories



Spojnica muška



Spojnica muška



Spojnica ženska



Spojnica ženska



Pripremna grupa 3/8"



Pripremna grupa 1/2"



Crijevo spiralno za zrak

## Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.