

带把手的气钻

1515H



配置文件




产品属性

- 双向转动
- 每分钟800转的空载转速
- 最大气压：6.2 Bar
- 空气消耗量113 升/分钟
- 1/4"进气口
- 钻头直径1.5 - 13mm
- 3/8"主轴螺纹，24 UNF
- 内部软管尺寸10mm

优势：

- 此尺寸的极限功率
- 轻型紧凑易用工具

- 提供更优支撑的可调把手
- 易用气动开关
- 省力的人体工程学手柄
- 可减震的把手塑料套
- 双向转动
- 快速更换制动装置

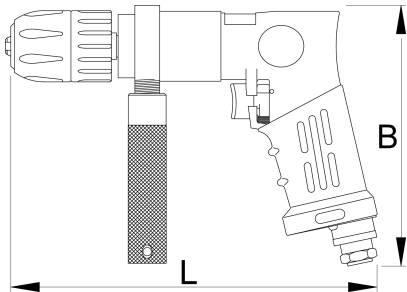

Barcode	L	B	Weight
617727	220	150	1570

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.


用途 (pictures)



Photo (pictures)




Accessories




气动管接头



气动管接头



气动管接头



气动管接头



3/8"气动过滤调节器和润滑器



1/2"气动过滤调节器和润滑器



螺旋气动软管

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.