# Pneumatic drill with handle

1515H



## Profiles


## Product features

- reversible turning
- free speed 800 revolution per minutes
- maximum air pressure : 6,2 Bar
- air consumption 113 l/min
- air inlet 1/4"
- chuck capacity 1,5 - 13mm
- spindle thread 3/8", 24 UNF
- internal hose size 10mm

## Advantages:

- extreme power based on size
- lightweight, compact and easy-to-master tool

- adjustable handle for better support
- handy turn-on switch
- ergonomically shaped handle for work without effort
- plastic cover for handle dampens vibrations
- reversible turning
- quick change retainer

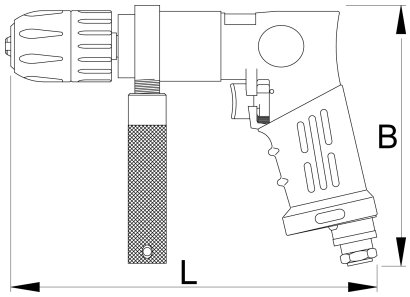


| | L | B | |
|---|---|---|---|
| 617727 | 220 | 150 | 1570 |

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

## Usage (pictures)



## Photo (pictures)



# Accessories

 Coupling, male part

 Coupling, male part

 Coupling, female part

 Coupling, female part

 Pneumatic filter regulator and lubricator 3/8"

 Pneumatic filter regulator and lubricator 1/2"

 Spiral pneumatic hose

## Safety tips

- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.

- Always disconnect tools not in use from the air supply.