Pneumatische boormachine met greep

1515H



Profielen


Product attributen

- reversible turning
- free speed 800 revolution per minutes
- maximum air pressure : 6,2 Bar
- air consumption 113 l/min
- air inlet 1/4"
- chuck capacity 1,5 - 13mm
- spindle thread 3/8", 24 UNF
- internal hose size 10mm

Voordelen:

- extreme power based on size
- lightweight, compact and easy-to-master tool

- adjustable handle for better support
- handy turn-on switch
- ergonomically shaped handle for work without effort
- plastic cover for handle dampens vibrations
- reversible turning
- quick change retainer

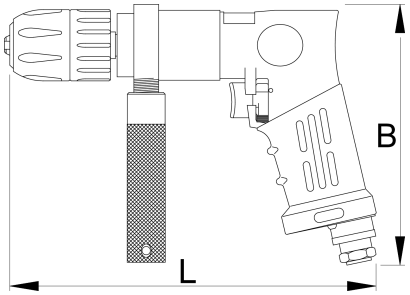

	L	B	
617727	220	150	1570

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Gebruik (Afbeeldingen)



Foto (Afbeeldingen)



Accessoires

 Koppeling, man

 Koppeling, man

 Koppeling, vrouw

 Koppeling, vrouw

 Pneumatische filterdrukregelaar en olievernevelaar 3/8"

 Pneumatische filterdrukregelaar en olievernevelaar 1/2"

 Spiraalslang

Veiligheidstips

- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.

- Always disconnect tools not in use from the air supply.