

Disqueuse a renvoi d'angle

1517S



Profils



Description produit


- Vitesse à vide : 4500 tr/min
- Pression d'air maximum : 6, 2 bars
- Consommation d'air : 340 l/min
- Entrée d'air : 1/4"
- Filetage du mandrin : 5/8"

Avantages :

- Outil de taille compacte
- Possibilité d'opérer à la fois de la main gauche ou droite
- Manche amovible
- Poignée marche/arrêt de sécurité

Utilisation:

- Meulage de soudures
- Meulage d'angles
- Restauration de surfaces inégales

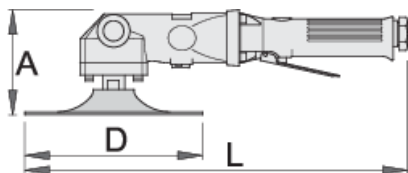

617729

L

375

A

100

D

175



2610

* Les images des produits ne sont pas contractuelles. Toutes les dimensions sont en mm, les poids en grammes.

Utilisation (pictures)



Photo (pictures)



Accessories



Embout fileté



Embout fileté



Raccord rapide fileté



Raccord rapide fileté



Régulateur, épurateur, lubrificateur 3/8"



Régulateur, épurateur, lubrificateur 1/2"



Tuyau pneumatique spiralé

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.