Brusilica kutna pneumatska

1517S



Profili

Atributi proizvoda

- broj okretaja u slobodnom hodu: 4500/min
- max. pritisak zraka: 6, 2 bara
- potrošnja zraka: 340 l/min
- priključak za zrak: 1/4"
- navoj glave: 5/8"

Prednosti:

- Lagan i kompaktan alat
- pogodno za ljevake i dešnjake
- zamjenjiva drška
- Praktično pozicioniran prekidač

Upotreba

- brušenje varova
- brušenje oštrih rubova

- za manje neravne površine

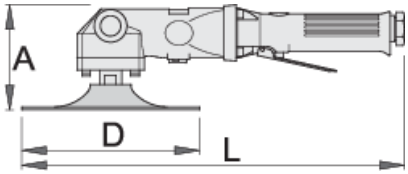

	L	A	D	
617729	375	100	175	2610

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

upotreba (pictures)



Photo (pictures)



Accessories

 Spojnica muška

 Spojnica muška

 Spojnica ženska

 Spojnica ženska

 Pripremna grupa 3/8"

 Pripremna grupa 1/2"

 Cijev spiralna za zrak

Safety tips

● The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.

● Regularly clean and dry the air filters and inlet air supply.

● Always use clean and dry air with the correct mixture of oil, for maximum tool life.

● Check the joints and ensure that the tubes and other equipment are not damaged before use.

● All tools should be gently oiled prior to being stored.

● Always store pneumatic tools in dry places away from water.

● Always use original spare parts.

● Repairs can be performed only by authorised staff people authorised by Unior d.d.

● Always disconnect tools not in use from the air supply.