

Pnömatik açılı zımpara aleti

1517S



Profiles



Product features


- 4500 devir/dakika serbest hız
- maksimum hava basıncı: 6,2 Bar
- hava tüketimi 340 l/dk
- hava girişi 1/4"
- mil dişi 5/8"

Avantajları:

- küçük ve kompakt alet
- sol ve sağ elini kullananlar için uygundur
- çıkarılabilir kol
- pratik açma düğmesi

Kullanım:

- kaynakların taşlanması
- keskin kenarların taşlanması
- küçük eşit olmayan yüzeylerin onarımı

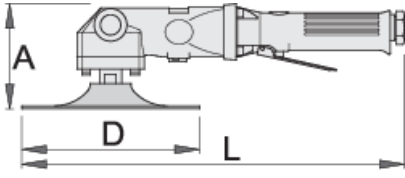

L

A

D



617729

375

100

175

2610

* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindedir.

Usage (pictures)



Photo (pictures)



Accessories



bağlantı elemanı, erkek parça



Bağlantı elemanı, erkek parça



bağlantı elemanı, dişi parça



Bağlantı elemanı, dişi parça



Pnömatik filtre düzenleme ve yağlama aleti 3/8"



Pnömatrik filtre düzenleme ve yağlama aleti 1/2"



Spiral pnömatrik hortum

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.