

Pneumatic angle grinder

1518



Profiles



Product features

- free speed 11000 revolution per minutes
- maximum air pressure: 6,2 Bar
- air consumption 170 l/min
- air inlet 1/4"


Advantages:

- removable handle
- safety lever prevents unwanted turn-on

Usage:

- protection from rotating parts

- also usable in small rooms/places
- tool industry
- cleaning of welds
- cleaning of concrete and wall surfaces
- cleaning of wooden surfaces
- removal of colours and varnish
- removal of rust
- cutting profile carriers and sheet metal
- other home use

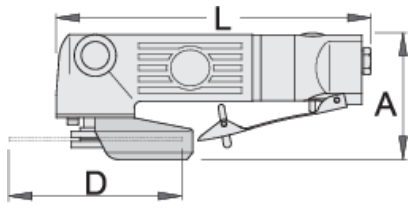

Barcode	L	A	D	Weight
617730	230	90	125	2175

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Usage (pictures)



Photo (pictures)



Accessories



Coupling, male part



Coupling, male part



Coupling, female part



Coupling, female part



Pneumatic filter regulator and lubricator 3/8"



Pneumatic filter regulator and lubricator 1/2"



Spiral pneumatic hose

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.