

# Pneumatische haakse slijper

1518



## Profielen



## Product attributen

- free speed 11000 revolution per minutes
- maximum air pressure: 6,2 Bar
- air consumption 170 l/min
- air inlet 1/4"

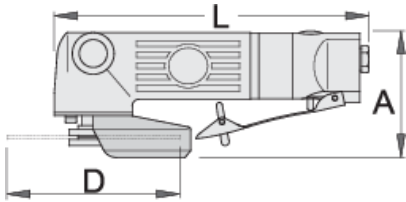
## Voordelen:



- removable handle
- safety lever prevents unwanted turn-on

## Gebruik:

- protection from rotating parts

- also usable in small rooms/places
- tool industry
- cleaning of welds
- cleaning of concrete and wall surfaces
- cleaning of wooden surfaces
- removal of colours and varnish
- removal of rust
- cutting profile carriers and sheet metal
- other home use



|  |     |    |     |   |
|--|-----|----|-----|---|
|  | L   | A  | D   |  |
| 617730   | 230 | 90 | 125 | 2175  |

\* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

### Gebruik (Afbeeldingen)



### Foto (Afbeeldingen)



### Accessoires



Koppeling, man



Koppeling, man



Koppeling, vrouw



Koppeling, vrouw



Pneumatische filterdrukregelaar en olieverniveelaar 3/8"



Pneumatische filterdrukregelaar en olieverniveelaar 1/2"



Spiraalslang

## Veiligheidstips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.