

# Pneumatic die grinder

1516



## 프로파일



## 제품 특징

- free speed 25000 revolution per minutes
- maximum air pressure: 6,2 Bar
- air consumption 113 l/min
- air inlet 1/4"
- collet capacity 6 mm
- internal hose size 10mm


## 장점:

- safety lever which prevents accidental turn-on
- simple clamping of thin cut-off wheels (grinding/polishing pins) and other parts/ extensions
- extreme power based on size
- small and compact tool
- continuously variable regulation of rpm

## 용도:

- precise grinding

- full grinding
- tool industry
- car industry
- aircraft industry
- cleaning of welds
- cleaning of concrete and wall surfaces
- cleaning of wooden surfaces
- removal of colours and varnish
- removal of rust
- grinding of bearings
- grinding of motor valves
- grinding of gears and coils
- various other surfaces

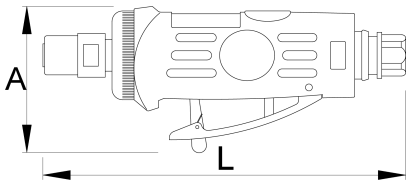

	<b>L</b>	<b>A</b>	
617731	155	60	390

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

### 사용법 (사진)



### 사진 (사진)



## 액세서리



Coupling, male part



Coupling, male part



Coupling, female part



Coupling, female part



Pneumatic filter regulator and lubricator 3/8"



Pneumatic filter regulator and lubricator 1/2"



Spiral pneumatic hose

## 안전 수칙



- 공구가 제대로 작동하려면 작업 중 공구의 압력이 6.2bar 이상이어야 합니다.
- 공기 필터와 흡입 에어 공급 장치를 정기적으로 청소하고 건조시킵니다.
- 최대 공구 수명을 위해 항상 올바른 오일 혼합과 함께 깨끗하고 건조한 공기를 사용하십시오.



- 사용하지 않는 공구는 항상 에어 공급 장치에서 분리하십시오.

- 사용하기 전에 조인트를 확인하고 튜브 및 기타 장비가 손상되지 않았는지 확인하십시오.
- 모든 공구는 보관하기 전에 부드럽게 기름칠을 해야 합니다.
- 공압 공구는 항상 물에서 멀리 떨어진 건조한 장소에 보관하십시오.
- 항상 정품 스페어 파트를 사용하십시오.
- 수리는 Unior d.d.에서 승인한 승인된 직원만 수행할 수 있습니다.