


# Socket 1/2", long type, 12 point

190/1L12p



## Profiles

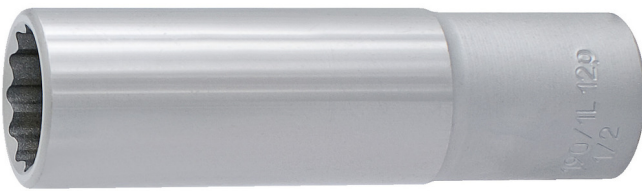


## Standards

ISO 2725 - 1

## Product features

- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009
- polished
- made according to standard ISO 2725-1 (only metric dimension)

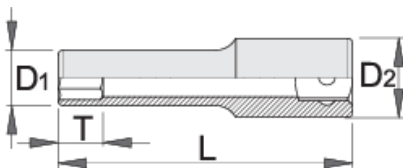

610762



10

D1

15

D2

22

L




77



12



85

		D1	D2	L	T↑	
610763	11	16.3	22	77	12	110
610764	12	17.6	22	77	12	100
610765	13	18.8	22	77	12	107
610766	14	20.4	22	77	15	112
610767	15	21.6	20.7	77	15	107
610768	16	22.9	21.5	77	15	121
610769	17	24	22	77	15	130
610770	18	25.4	23	77	18	150
610771	19	26	21	77	18	140
610772	20	27.9	24	77	18	176
610773	21	28	25	77	18	166
610774	22	30	26	77	21	197
610775	23	31.6	27	77	21	226
610776	24	32	28	77	24	223
610777	27	36	30	77	27	277
610778	30	40	34	77	30	317
610779	32	42	36	77	33	335
610780	3/8"	15	22	77	12	85

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## Frequently asked questions

**I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?**

When working with pneumatic screwdrivers, you must use an impact socket wrench.