

Ključ nasadni sa unutrašnjim TX profilom, prihvat 1/2"

191/1




Profili



Opis proizvoda

- materijal: premium hrom-vanadijum čelik
- kovan, u potpunosti poboljššan i ojačan
- hromiran (ISO 1456:2009)
- poliran

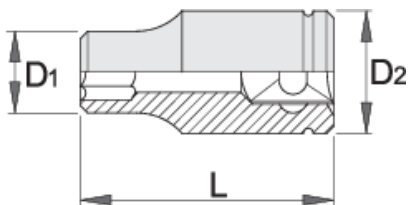

607141



E 10

D2

22

D1




14

L

38



58

|  |  | D2 | D1 | L |  |
|--|---|----|------|----|---|
| 607142 | E 11 | 22 | 15 | 38 | 52 |
| 607143 | E 12 | 22 | 15 | 38 | 55 |
| 607144 | E 14 | 22 | 17 | 38 | 57 |
| 607145 | E 16 | 22 | 19 | 38 | 62 |
| 607146 | E 18 | 22 | 21 | 38 | 78 |
| 607147 | E 20 | 26 | 23 | 40 | 95 |
| 607148 | E 22 | 26 | 25.3 | 40 | 105 |
| 607149 | E 24 | 28 | 27.3 | 40 | 119 |

* Fotografije proizvoda su simbolične. Sve dimenzije su u mm, a težina u gramima. Sve navedene dimenzije mogu odstupati u granicama tolerancija.

Najčešće postavljana pitanja

Nasadni ključ sam pričvrstio na pneumatski alat i zid ključa je napukao. Sta bi mogao biti razlog?

Pri korišćenju pneumatskih odvijača, obavezna je upotreba IMPACT nasadnih ključeva.