


Zástrčné hlavice IMBUS 1/2"

192/2HX




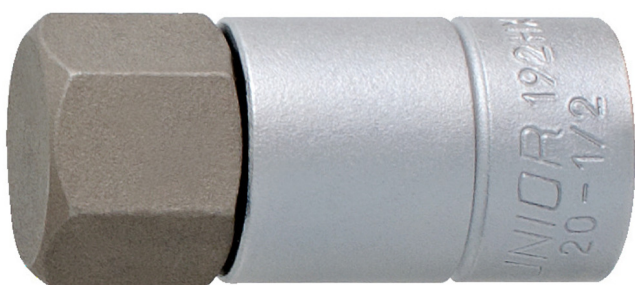


Profily



Vlastnosti produktu

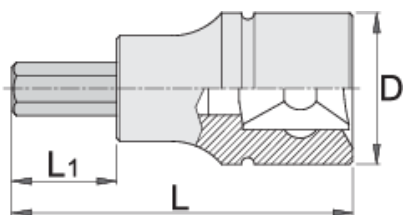- materiál: hlavice - Premium Flex chrom-vanadium ocel
- materiál: bit - Premium Flex Plus uhlíková ocel
- otvory jsou celé kalené a temperované
- Rozměry 17,19,22,24 pro demontáž a montáž předního kola
- Vyrobeno dle normy DIN 7422 (pouze metrický rozměr)



		D	L	L1	
600978	4	23	60	24	60
603420	5	23	60	24	60

		D	L	L1	
603421	6	23	60	24	60
603422	7	23	60	24	75
603423	8	23	60	24	81
605923	9	23	60	24	85
603424	10	23	60	24	95
603425	12	23	60	24	116
624033	13	23	60	24	100
603426	14	23	60	24	168
624034	15	23	60	24	115
603427	17	24	60	20	187
603428	19	26.5	60	20	195
623141	22	26,5	60	20	196
623142	24	26,5	60	20	210
619894	3/16"	22.9	40	24	60
619895	7/32"	22.9	40	24	60
619896	1/4"	22.9	40	24	60
619899	3/8"	22.9	40	24	95
619900	1/2"	22.9	40	24	116
619901	9/16"	22.9	40	24	168
619902	5/8"	22.9	40	24	187
619904	3/4"	26.8	40	21	195

* Obrázky produktů jsou symbolické. Všechny rozměry jsou v mm a hmotnost v gramech. Všechny uvedené rozměry se mohou lišit v toleranci.

Používání (obrázky)

