


Imbusz (HX) csavarhúzófej, 1/2"

192/2HX




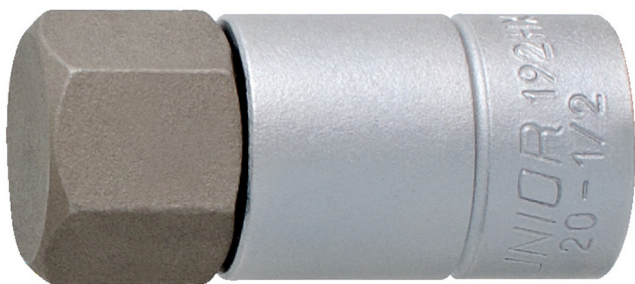

Profilok



Termékjellemzők

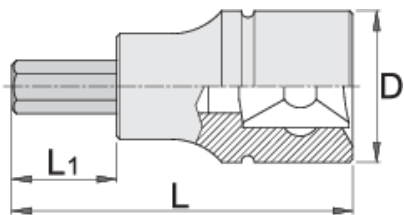- anyaga: fej Premium Flex króm-vanádium acélból
- anyaga: behajtóhegy Premium Plus szénacélból
- teljes anyagában nemesített
- 17, 19, 22, 24 méretek az első kerek fel- és leszerelésénél alkalmazhatóak
- DIN 7422 szabvány szerint (csak metrikus méretek)



		D	L	L1	
600978	4	23	60	24	60
603420	5	23	60	24	60

		D	L	L1	
603421	6	23	60	24	60
603422	7	23	60	24	75
603423	8	23	60	24	81
605923	9	23	60	24	85
603424	10	23	60	24	95
603425	12	23	60	24	116
624033	13	23	60	24	100
603426	14	23	60	24	168
624034	15	23	60	24	115
603427	17	24	60	20	187
603428	19	26.5	60	20	195
623141	22	26,5	60	20	196
623142	24	26,5	60	20	210
619894	3/16"	22.9	40	24	60
619895	7/32"	22.9	40	24	60
619896	1/4"	22.9	40	24	60
619899	3/8"	22.9	40	24	95
619900	1/2"	22.9	40	24	116
619901	9/16"	22.9	40	24	168
619902	5/8"	22.9	40	24	187
619904	3/4"	26.8	40	21	195

* A termékeképek illusztrációk. Minden feltüntetett méret milliméterben, a tömegek grammokban. Az összes feltüntetett méret eltérhet a toleranciának megfelelően.

Használat (pictures)

