# Socket 3/4", 6 point

197/1 6p



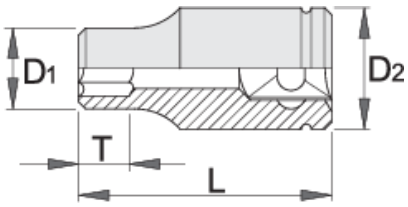

## Profiles

## Standards

ISO 2725 - 1

## Product features

- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009
- polished
- torque: DIN 899 range E
- made according to standard ISO 2725-1 (only metric dimension)




| | mm | D1 | D2 | L | T | |
|---|---|---|---|---|---|---|
| 619698 | 19 | 29,2 | 33 | 50 | 14 | 175 |
| 602723 | 22 | 32.2 | 36 | 50 | 14 | 220 |
| 602725 | 24 | 34.2 | 36 | 51 | 16 | 230 |
| 602726 | 26 | 37 | 36 | 52 | 16,5 | 230 |
| 602727 | 27 | 38 | 36 | 52 | 22 | 239 |
| 602728 | 28 | 39,5 | 36 | 52 | 22 | 242 |
| 602729 | 30 | 42 | 36 | 54 | 24 | 273 |
| 602730 | 32 | 44 | 36 | 56 | 26 | 295 |
| 602731 | 34 | 47 | 36 | 56 | 26 | 347 |
| 619701 | 35 | 48 | 38 | 58 | 26 | 401 |
| 602732 | 36 | 50 | 38 | 58 | 28 | 400 |
| 602733 | 38 | 52 | 38 | 60 | 28 | 488 |
| 602734 | 41 | 56 | 40 | 64 | 30 | 502 |
| 602735 | 46 | 62 | 42 | 66 | 32 | 621 |
| 602736 | 50 | 68 | 42 | 70 | 34 | 708 |
| 617527 | 55 | 74 | 45 | 76 | 38 | 914 |
| 603135 | 60 | 80 | 45 | 78 | 42 | 1105 |

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

## Frequently asked questions

**I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?**
When working with pneumatic screwdrivers, you must use an impact socket wrench.