

Socket 3/4", 6 point

197/1 6p



Profiles

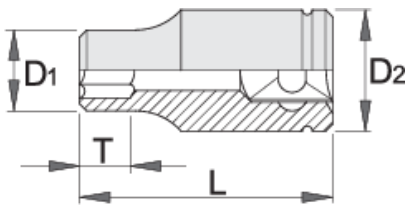






Standards

ISO 2725 - 1

Product features

- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009
- polished
- torque: DIN 899 range E
- made according to standard ISO 2725-1 (only metric dimension)



		D1	D2	L	T		
619698	19	29,2	33	50	14	175	
602723	22	32.2	36	50	14	220	
602725	24	34.2	36	51	16	230	
602726	26	37	36	52	16,5	230	
602727	27	38	36	52	22	239	
602728	28	39,5	36	52	22	242	
602729	30	42	36	54	24	273	
602730	32	44	36	56	26	295	
602731	34	47	36	56	26	347	
619701	35	48	38	58	26	401	
602732	36	50	38	58	28	400	
602733	38	52	38	60	28	488	
602734	41	56	40	64	30	502	
602735	46	62	42	66	32	621	
602736	50	68	42	70	34	708	
617527	55	74	45	76	38	914	
603135	60	80	45	78	42	1105	

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

Frequently asked questions

I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?

When working with pneumatic screwdrivers, you must use an impact socket wrench.