

Steckschlüssel 3/4 Zoll

197/1 6p



Profile

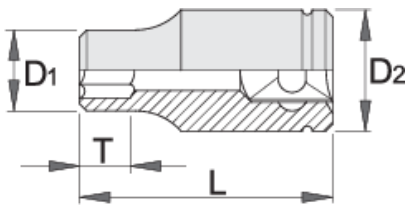


Standards




ISO 2725-1

Produkteigenschaften

- Material: Premium Flex Chrom-Vanadium-Stahl
- geschmiedet, gehärtet und vergütet
- verchromt gemäß Industriestandard ISO 1456:2009
- poliert
- Drehmoment: DIN 899
- gefertigt laut Standard ISO 2725-1 (nur metrische Dim.)



| Barcode | mm | D1 | D2 | L | T | Icon |
|---------|---------|------|------|----|------|------|
| 619698 | 19 | 29,2 | 33 | 50 | 14 | 175 |
| 602723 | 22 | 32.2 | 36 | 50 | 14 | 220 |
| 602724 | 23 | 33.2 | 36 | 50 | 14 | 221 |
| 602725 | 24 | 34.2 | 36 | 51 | 16 | 230 |
| 602726 | 26 | 37 | 36 | 52 | 16,5 | 230 |
| 602727 | 27 | 38 | 36 | 52 | 22 | 239 |
| 602728 | 28 | 39,5 | 36 | 52 | 22 | 242 |
| 619702 | 29 | 40,5 | 36 | 52 | 22 | 270 |
| 602729 | 30 | 42 | 36 | 54 | 24 | 273 |
| 602730 | 32 | 44 | 36 | 56 | 26 | 295 |
| 602731 | 34 | 47 | 36 | 56 | 26 | 347 |
| 619701 | 35 | 48 | 38 | 58 | 26 | 401 |
| 602732 | 36 | 50 | 38 | 58 | 28 | 400 |
| 602733 | 38 | 52 | 38 | 60 | 28 | 488 |
| 602734 | 41 | 56 | 40 | 64 | 30 | 502 |
| 602735 | 46 | 62 | 42 | 66 | 32 | 621 |
| 602736 | 50 | 68 | 42 | 70 | 34 | 708 |
| 617527 | 55 | 74 | 45 | 76 | 38 | 914 |
| 603135 | 60 | 80 | 45 | 78 | 42 | 1105 |
| 609383 | 7/8" | 32.2 | 36 | 50 | 14 | 220 |
| 609384 | 15/16" | 34.2 | 36.2 | 51 | 16.5 | 231 |
| 609385 | 1" | 37 | 36 | 52 | 16 | 234 |
| 609386 | 1.1/16" | 38 | 36 | 52 | 22 | 224 |
| 609387 | 1.1/8" | 40 | 38 | 52 | 22 | 265 |
| 609388 | 1.1/4" | 44 | 38 | 56 | 24 | 313 |
| 609390 | 1.3/8" | 48 | 42 | 58 | 26 | 406 |

|  |  | D1 | D2 | L | T |  |
|---|--|----|----|----|----|--|
| 609391 | 1.7/16" | 50 | 42 | 58 | 28 | 415 |
| 609392 | 1.1/2" | 52 | 45 | 60 | 28 | 414 |
| 609393 | 1.5/8" | 56 | 45 | 64 | 30 | 572 |
| 609394 | 1.11/16" | 58 | 45 | 65 | 32 | 595 |
| 609396 | 1.7/8" | 64 | 48 | 70 | 34 | 741 |
| 609397 | 2" | 68 | 48 | 72 | 36 | 842 |

* Bilder von Produkten sind Symbolfotos. Abmessungen sind in mm, Gewichte in Gramm.

Häufig gestellte Fragen

I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?

When working with pneumatic screwdrivers, you must use an impact socket wrench.