

Dopsleutel 1"

199/1 6p



Profielen




Standaard

ISO 2725-1

Product attributen

- materiaal: premium flex chroom vanadium staal
- drop forged, entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009
- gepolijst
- made according to standard ISO 2725-1 (only metric dimension)

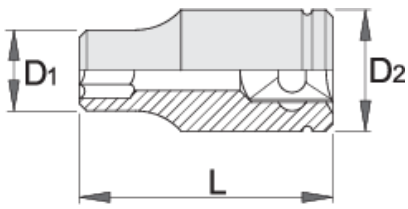

		D1	D2	L	T	
603096	46	65	50	75	34	849
603097	50	70	55	75	34	1039
603098	55	76	57	80	40	1222
603099	60	82	57	84	42	1383
603100	65	88	57	87	44	1607
603101	70	94	68	93	48	2039
603102	75	100	68	97	52	2243
603103	80	105	68	103	54	2479

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Veelgestelde vragen

I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?

When working with pneumatic screwdrivers, you must use an impact socket wrench.