

Dopsleutel 1"

199/1 6p



Profielen




Standaard

ISO 2725-1

Product attributen

- materiaal: premium flex chroom vanadium staal
- drop forged, entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009
- gepolijst
- made according to standard ISO 2725-1 (only metric dimension)

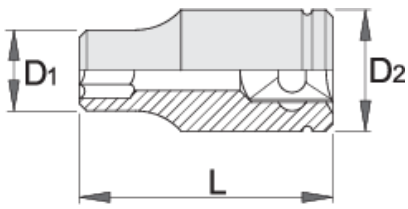

|  |  | D1 | D2 | L | T |  |
|--|---|-----|----|-----|----|---|
| 603096 | 46 | 65 | 50 | 75 | 34 | 849 |
| 603097 | 50 | 70 | 55 | 75 | 34 | 1039 |
| 603098 | 55 | 76 | 57 | 80 | 40 | 1222 |
| 603099 | 60 | 82 | 57 | 84 | 42 | 1383 |
| 603100 | 65 | 88 | 57 | 87 | 44 | 1607 |
| 603101 | 70 | 94 | 68 | 93 | 48 | 2039 |
| 603102 | 75 | 100 | 68 | 97 | 52 | 2243 |
| 603103 | 80 | 105 | 68 | 103 | 54 | 2479 |

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Veelgestelde vragen

I attached the socket wrench to the pneumatic tool and the wall cracked. What could be wrong?

When working with pneumatic screwdrivers, you must use an impact socket wrench.