Douille à chocs 1/2” 6 pans longue

231/4L6p



Profils

1/2" Premium Flex

Description produit


- Matière : acier Chrome Vanadium Premium Flex
- Forgée à chaud, entièrement traitée thermiquement et trempée
- Finition phosphatée suivant la norme ISO 9717
- Fabriquée dans le respect de la norme ISO 2725-2 (uniquement les dimensions métriques)

Avantages :

- Long design provides easy access to deep-set fasteners.
- 6-point profile ensures optimal torque transfer while reducing the risk of rounding fasteners.
- Phosphate finish offers enhanced wear and corrosion resistance.
- Manufactured in accordance with ISO 2725-2 for dependable professional performance.

Utilisation :

- Automotive and commercial vehicle maintenance.
- Use with pneumatic and cordless impact wrenches.
- Tightening and loosening fasteners on long threaded studs.
- Professional workshops, industrial maintenance, and repair operations

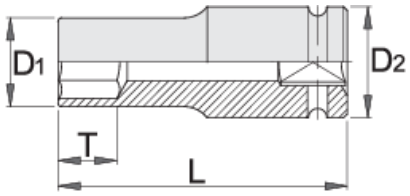

	mm	D1	D2	L	T	
607918	10	17.5	25	78	14	144
607919	11	18.7	25	78	14	166
607920	12	20	25	78	14	160
607921	13	21.3	25	78	14	168
607922	14	22.5	25	78	17	174
607923	15	23.7	30	78	17	226
607924	16	25	30	78	17	259
607925	17	26.2	30	78	17	244
609401	18	27.5	30	78	17	257
607926	19	28.7	30	78	19	265
607927	21	30	30	78	24	280
607928	22	32	30	78	24	292
607929	23	32	30	78	24	275
607930	24	35	30	78	24	337
607931	27	38.7	30	78	24	395
609402	28	40	30	78	24	395
607932	30	42	30	78	24	432
607933	32	44	30	78	24	421

* Les images des produits ne sont pas contractuelles. Toutes les dimensions sont en mm, les poids en grammes.

Safety (pictures)

