

Slagmoerdopsleutel 1/2", TX inwendig

231/4TX




Profielen



Product attributen

- materiaal: premium flex chroom vanadium staal
- drop forged, entirely hardened and tempered
- surface finish: phosphated to standard ISO 9717

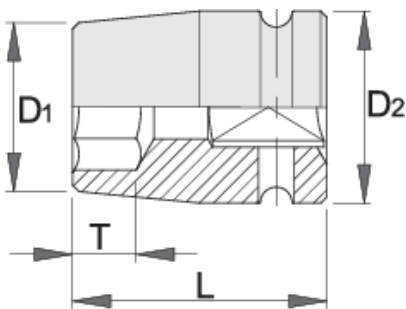

612880



E 10

D1

15

D2

25

L




38

T

7.5



90

|  |  | D1 | D2 | L | T |  |
|---|--|------|----|----|------|--|
| 612881 | E 12 | 16 | 25 | 38 | 8.5 | 90 |
| 612882 | E 14 | 18.5 | 25 | 38 | 10 | 95 |
| 612883 | E 16 | 20 | 25 | 38 | 11 | 95 |
| 612884 | E 18 | 22 | 25 | 38 | 12 | 95 |
| 612885 | E 20 | 25 | 30 | 38 | 13.5 | 145 |
| 612886 | E 24 | 28.5 | 30 | 45 | 21 | 170 |

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Veiligheid (Afbeeldingen)

