

Slagmoerdopsleutel 1/2", TX inwendig

231/4TX




Profielen



Product attributen

- materiaal: premium flex chroom vanadium staal
- drop forged, entirely hardened and tempered
- surface finish: phosphated to standard ISO 9717

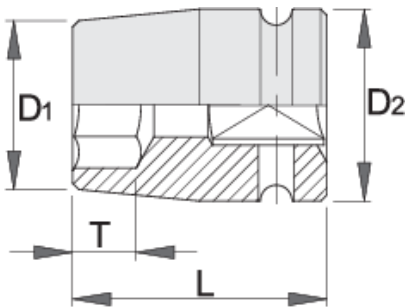

612880



E 10

D1

15

D2

25

L

38

T





7.5



90



Till end of stock

		D1	D2	L	T		
612881	E 12	16	25	38	8.5	90	Till end of stock
612882	E 14	18.5	25	38	10	95	Till end of stock
612883	E 16	20	25	38	11	95	Till end of stock
612884	E 18	22	25	38	12	95	Till end of stock
612885	E 20	25	30	38	13.5	145	Till end of stock
612886	E 24	28.5	30	45	21	170	Till end of stock

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Veiligheid (Afbeeldingen)

