

Impact socket 3/4", long type, 6 point

232/4L6p







Profiles



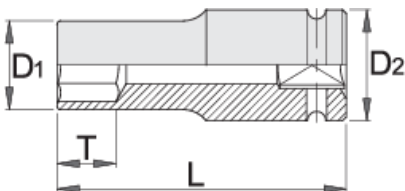


Product features

- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- surface finish: phosphated to standard ISO 9717
- made according to standard ISO 2725-2 and DIN 3129



|  |  | D1 | D2 | L | T |  |
|--|---|----|----|----|----|---|
| 607934 | 17 | 31 | 44 | 95 | 17 | 587 |
| 607935 | 19 | 33 | 44 | 95 | 19 | 580 |
| 607936 | 21 | 35 | 44 | 95 | 21 | 589 |

|  |  | D1 | D2 | L | T |  |
|---|--|----|----|----|----|--|
| 607937 | 22 | 37 | 44 | 95 | 22 | 643 |
| 607938 | 24 | 39 | 44 | 95 | 24 | 656 |
| 607939 | 27 | 43 | 44 | 95 | 27 | 731 |
| 609404 | 28 | 44 | 44 | 95 | 28 | 708 |
| 607940 | 30 | 47 | 44 | 95 | 30 | 802 |
| 607941 | 32 | 49 | 44 | 95 | 32 | 821 |
| 607942 | 33 | 51 | 44 | 95 | 33 | 906 |
| 607943 | 36 | 54 | 44 | 95 | 36 | 944 |
| 607944 | 41 | 60 | 44 | 95 | 38 | 1078 |
| 607945 | 46 | 67 | 44 | 95 | 38 | 1298 |

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Safety (pictures)

