

Impact socket 3/4", long type, 6 point

232/4L6p



Profiles



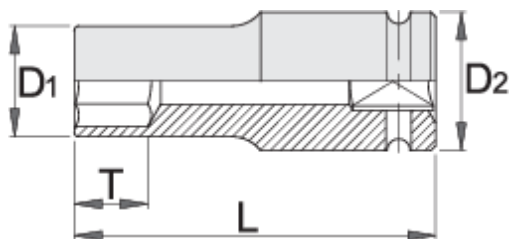
[\(/ar/about-us/materials\)](#)






[\(/ar/support/warranty\)](#)

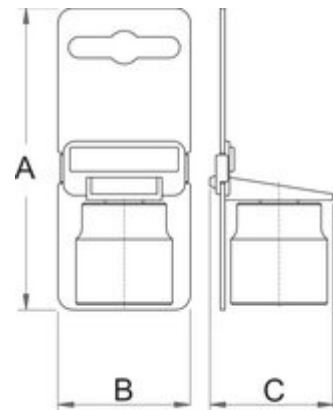
Product features

- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- surface finish: phosphated to standard ISO 9717
- made according to standard ISO 2725-2 and DIN 3129





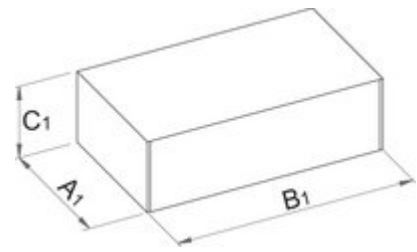
Barcode	mm	D1	D2	L	T	Icon
607934	17	31	44	95	17	587
607935	19	33	44	95	19	580
607936	21	35	44	95	21	589
607937	22	37	44	95	22	643

		D1	D2	L	T	
607938	24	39	44	95	24	656
607939	27	43	44	95	27	731
609404	28	44	44	95	28	708
607940	30	47	44	95	30	802
607941	32	49	44	95	32	821
607942	33	51	44	95	33	906
607943	36	54	44	95	36	944
607944	41	60	44	95	38	1078
607945	46	67	44	95	38	1298



Retail packaging

	MA	MB	MC	
607934	205	58	44	595
607935	205	58	44	595
607936	205	58	44	605
607937	205	58	44	660
607938	205	58	44	660
607939	205	58	44	745
609404	205	58	44	720
607940	205	58	47	815
607941	205	58	49	835
607942	205	58	51	890
607943	205	58	54	945
607944	205	60	60	1080
607945	205	67	67	1260



Transport packaging

Barcode	Hand icon	TA	TB	TC	Weight icon
607934	1	70	240	48	665
607935	1	70	240	48	665
607936	1	70	240	48	675
607937	1	70	240	48	730
607938	1	70	240	48	730
607939	1	70	240	48	815
609404	1	70	240	48	790
607940	1	80	245	59	900
607941	1	80	245	59	920
607942	1	80	245	59	975
607943	1	80	245	59	1030
607944	1	95	231	71	1180
607945	1	95	231	71	1360