

# Impact socket 3/4", long type, 6 point

232/4L6p

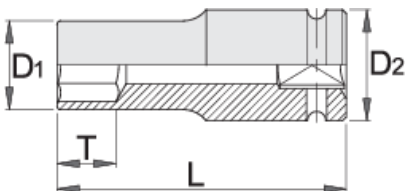


## Profiles






## Product features

- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- surface finish: phosphated to standard ISO 9717
- made according to standard ISO 2725-2 and DIN 3129



| Barcode | mm | D1 | D2 | L  | T  | Icon |
|---------|----|----|----|----|----|------|
| 607934  | 17 | 31 | 44 | 95 | 17 | 587  |
| 607935  | 19 | 33 | 44 | 95 | 19 | 580  |
| 607936  | 21 | 35 | 44 | 95 | 21 | 589  |

|  |  | D1 | D2 | L  | T  |  |
|---|--|----|----|----|----|--|
| 607937  | 22   | 37 | 44 | 95 | 22 | 643  |
| 607938  | 24   | 39 | 44 | 95 | 24 | 656  |
| 607939  | 27   | 43 | 44 | 95 | 27 | 731  |
| 609404  | 28   | 44 | 44 | 95 | 28 | 708  |
| 607940  | 30   | 47 | 44 | 95 | 30 | 802  |
| 607941  | 32   | 49 | 44 | 95 | 32 | 821  |
| 607942  | 33   | 51 | 44 | 95 | 33 | 906  |
| 607943  | 36   | 54 | 44 | 95 | 36 | 944  |
| 607944  | 41   | 60 | 44 | 95 | 38 | 1078   |
| 607945  | 46   | 67 | 44 | 95 | 38 | 1298   |

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

### Safety (pictures)

