3/4" 气动套筒，加长

232/4L6p



配置文件

产品属性

- 材料：铬钼钢
- 落锻，完全淬火与回火
- 表面处理：根据ISO 9717标准进行磷酸盐处理
- 根据DIN3129标准和ISO 2725-2制造标准制造


优势：

- Long design provides easy access to deep-set fasteners.
- 6-point profile ensures optimal torque transfer while reducing the risk of rounding fasteners.
- Phosphate finish offers enhanced wear and corrosion resistance.
- Manufactured in accordance with ISO 2725-2 for dependable professional performance.

用途:

- Automotive and commercial vehicle maintenance.
- Use with pneumatic and cordless impact wrenches.
- Tightening and loosening fasteners on long threaded studs.

- Professional workshops, industrial maintenance, and repair operations

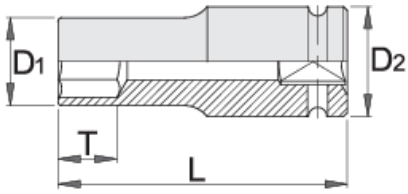

	mm	D1	D2	L	T	
607934	17	31	44	95	17	587
607935	19	33	44	95	19	580
607936	21	35	44	95	21	589
607937	22	37	44	95	22	643
607938	24	39	44	95	24	656
607939	27	43	44	95	27	731
609404	28	44	44	95	28	708
607940	30	47	44	95	30	802
607941	32	49	44	95	32	821
607942	33	51	44	95	33	906
607943	36	54	44	95	36	944
607944	41	60	44	95	38	1078
607945	46	67	44	95	38	1298

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

Related products


3/4"冲击套筒

Safety (pictures)

