

Insulated hex screwdriver socket 3/8"

236/2HXVDEDP



Profiles



Standards

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Product features

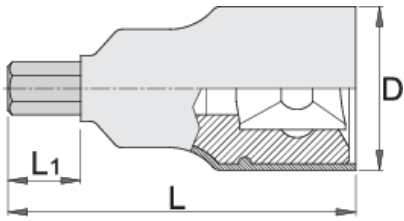
- material (Socket): Premium flex chrome vanadium steel
- material: bit from premium chrome vanadium steel
- entirely hardened and tempered
- made according to standard DIN 7422 and EN IEC 60900




Advantages:

- double layered - double coloured insulation for additional safety
- controlled according to standard EN IEC 60900

Important!

- if second layer is visible, replace your insulated tool with a new one.



		L	L1	D		
619171	4	67	8	23.6	46	Till end of stock
619172	5	67	8	24.4	49	Till end of stock
619173	6	67	8	23.4	48	Till end of stock
619174	8	67	8	24	54	Till end of stock

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.