

Ključ nasadni imbus, izolirani, prihvat 3/8"

236/2HXVDEDP



Profili



Zatvori pretraživanje

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Atributi proizvoda


- materijal: glava: Premium Flex Plus ugljični čelik, kromirana
- materijal: vrh: Premium Plus alatni čelik, nauljeno protiv korozije
- u cijelosti ojačan i zakaljen
- u potpunosti proizveden u skladu s DIN 7422 i EN IEC 60900


Prednosti:

- obloženi dvostrukim izolacijskim slojem sa dvije boje, koje omogućuju dodatnu sigurnost
- kontrola prema standardu EN IEC 60900

Važno!

- ukoliko drugi sloj postane vidljiv, alat zamijenite novim.

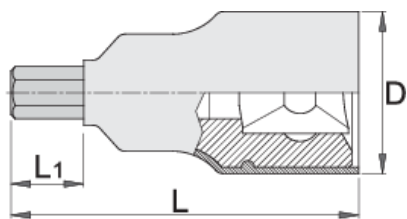

		L	L1	D		
619171	4	67	8	23.6	46	Till end of stock
619172	5	67	8	24.4	49	Till end of stock
619173	6	67	8	23.4	48	Till end of stock
619174	8	67	8	24	54	Till end of stock

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.