

# Nastavek vijačni 3/8" inbus, izoliran

236/2HXVDEDP



## Profili



## standard

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Atributi izdelka


- material: glava: Premium Flex krom vanadijevo jeklo, kromirana
- material: vijačni nastavek: Premium Plus ogljikovo jeklo, protikorozijsko naoljen
- v celoti poboljššan
- v celoti izdelan v skladu s standardom DIN 7422 in EN IEC 60900

## Prednosti:

- izoliran z dvoplastno - dvobarvno izolirno maso, s čimer je zagotovljena dodatna varnost
- kontrola s standardom EN IEC 60900

## Pomembno!

- ko je vidna druga zaščitna plast, je potrebno zamenjati izolirano orodje z novim

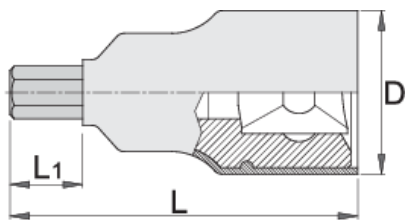

		L	L1	D		
619171	4	67	8	23.6	46	Till end of stock
619172	5	67	8	24.4	49	Till end of stock
619173	6	67	8	23.4	48	Till end of stock
619174	8	67	8	24	54	Till end of stock

\* Slike proizvodov so simbolične. Vse dimenzije so v mm, masa v g. Vse navedene dimenzije lahko odstopajo v tolerančnih merah.