

# Insulated socket 3/8", 6 point

Hidden

238/2VDEDP



## Profiles



## Standards

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Product features

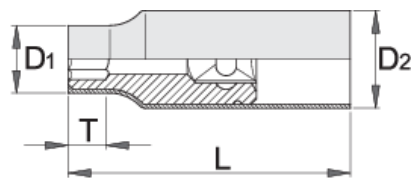
- material: premium flex chrome vanadium steel
- drop forged, entirely hardened and tempered
- head: trivalent chrome plated according to ISO 1456:2009
- made according to standard ISO 2725-1 and EN IEC 60900:2018





## Advantages:

- double layered - double coloured insulation for additional safety
- controlled according to standard EN IEC 60900

Important!

- if second layer is visible, replace your insulated tool with a new one.



		D1	D2	L	T		
619161	10	18.7	23	46.5	10	26	Till end of stock
619162	11	20.7	23	46.5	10	40	Till end of stock
619163	12	21.8	23	46.5	10	40	Till end of stock
619165	14	24.9	23	46.5	14	50	Till end of stock
619166	17	28.6	23	49	15	70	Till end of stock

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Frequently asked questions

Can an insulated socket wrench be used with a normal ratchet?

A non-insulated socket wrench cannot be used with a normal ratchet because it has additional protection in the connection area.