

Ključ nasadni, izolirani 3/8"

238/2VDEDP



Profili



Standardi

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Atributi proizvoda

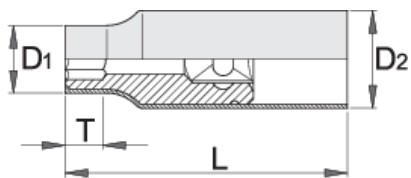
- materijal: krom-vanadij
- kovan, u cijelosti ojačan i zakaljen
- glava: kromirana (ISO 1456:2009)
- izrađeni prema standardu DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018





Prednosti:

- obloženi dvostrukim izolacijskim slojem sa dvije boje, koje omogućuju dodatnu sigurnost
- kontrolirano prema standardu EN IEC 60900

Važno!

- ukoliko drugi sloj postane vidljiv, alat zamijenite novim.



		D1	D2	L	T		
619161	10	18.7	23	46.5	10	26	Till end of stock
619162	11	20.7	23	46.5	10	40	Till end of stock
619163	12	21.8	23	46.5	10	40	Till end of stock
619165	14	24.9	23	46.5	14	50	Till end of stock
619166	17	28.6	23	49	15	70	Till end of stock

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Frequently asked questions

Can an insulated socket wrench be used with a normal ratchet?

A non-insulated socket wrench cannot be used with a normal ratchet because it has additional protection in the connection area.