

# Ključ nasadni, izolirani, prihvat 3/8" 6-kutni

238/2VDEDP



## Profili



## Zatvori pretraživanje

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Atributi proizvoda

- materijal: Premium Flex krom-vanadij
- kovan, u cijelosti ojačan i zakaljen
- glava: kromirana (ISO 1456:2009)
- izrađeni prema standardu DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

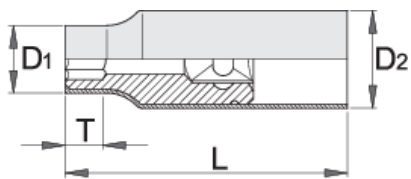
## Prednosti:





- obloženi dvostrukim izolacijskim slojem sa dvije boje, koje omogućuju dodatnu sigurnost

- kontrola prema standardu EN IEC 60900

Važno!

- ukoliko drugi sloj postane vidljiv, alat zamijenite novim.



		D1	D2	L	T		
619161	10	18.7	23	46.5	10	26	Till end of stock
619162	11	20.7	23	46.5	10	40	Till end of stock
619163	12	21.8	23	46.5	10	40	Till end of stock
619165	14	24.9	23	46.5	14	50	Till end of stock
619166	17	28.6	23	49	15	70	Till end of stock

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

## Frequently asked questions

### Can an insulated socket wrench be used with a normal ratchet?

A non-insulated socket wrench cannot be used with a normal ratchet because it has additional protection in the connection area.