

Bussola isolata 3/8", 6 punti

238/2VDEDP



Profili



Standard

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Attributi del prodotto

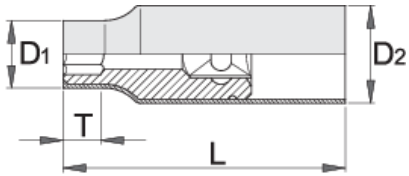
- materiale: acciaio al cromo vanadio flex premium
- forgiata, interamente bonificata
- testa: cromata ISO 1456:2009
- conforme allo standard DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018





Vantaggi:

- isolamento a doppio strato - doppio colore - per una doppia sicurezza
- controllo 100% - ogni pezzo è testato con test elettrico

Importante!

- se è visibile il secondo strato, sostituite il vostro attrezzo VDE con uno nuovo



		D1	D2	L	T		
619161	10	18.7	23	46.5	10	26	Till end of stock
619162	11	20.7	23	46.5	10	40	Till end of stock
619163	12	21.8	23	46.5	10	40	Till end of stock
619165	14	24.9	23	46.5	14	50	Till end of stock
619166	17	28.6	23	49	15	70	Till end of stock

* Le immagini dei prodotti sono puramente simboliche. Tutte le dimensioni sono in mm, peso in grammi.

Frequently asked questions

Can an insulated socket wrench be used with a normal ratchet?

A non-insulated socket wrench cannot be used with a normal ratchet because it has additional protection in the connection area.