

Insulated socket 3/8", 6 point

238/2VDEDP



프로파일



표준

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

제품 특징

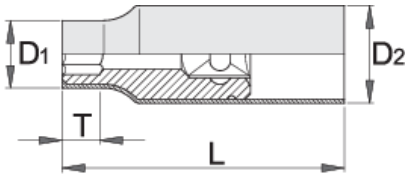
- 재질: 프리미엄 플렉스 크롬 바나듐 스틸
- drop forged, entirely hardened and tempered
- head: trivalent chrome plated according to ISO 1456:2009
- made according to standard ISO 2725-1 and EN IEC 60900:2018





장점:

- double layered - double coloured insulation for additional safety
- controlled according to standard EN IEC 60900

Important!

- if second layer is visible, replace your insulated tool with a new one.



		D1	D2	L	T		
619161	10	18.7	23	46.5	10	26	Till end of stock
619162	11	20.7	23	46.5	10	40	Till end of stock
619163	12	21.8	23	46.5	10	40	Till end of stock
619165	14	24.9	23	46.5	14	50	Till end of stock
619166	17	28.6	23	49	15	70	Till end of stock

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

자주 묻는 질문

절연 소켓 렌치를 일반 라쳇과 함께 사용할 수 있습니까?

비절연 소켓 렌치는 연결 부위에 추가 보호 장치가 있기 때문에 일반 라쳇과 함께 사용할 수 없습니다.