

# Račna dvosmjerna izolirana, prihvat 3/8"

238.1AVDEDP



## Profili



## Zatvori pretraživanje

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Atributi proizvoda


- materijal: Premium Flex alatni čelik
- gumb za promjenu pravca okretanja
- izrađeni prema standardu DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Prednosti:

- obloženi dvostrukim izolacijskim slojem sa dvije boje, koje omogućuju dodatnu sigurnost
- mehanizam sa 75 zuba
- radni kut 4,8°
- kontrola prema standardu EN IEC 60900

## Važno!

- ukoliko drugi sloj postane vidljiv, alat zamijenite novim.

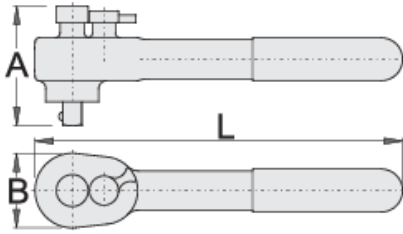

619118



3/8"

L

200

B

72

A

42



375



Till end of stock

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.