

Open bottom bracket wrench 16 notch

1609/2HOBBY



Profiles




[./eng/support/warranty](/eng/support/warranty).

Product features

- material: premium flex plus carbon steel
- surface finish: chrome plated according to ISO 1456:2009
- Tool also fits the disc brake rotor nuts with 16 external notches.

How to use the tool:

- The open bottom bracket wrench is used to remove and install Shimano® Hollowtech II, Campagnolo® Ultra-Torque and Power Torque, Race Face®, FSA®, SRAM®, Truvativ®, Chris King® bottom brackets as well as many and others. The 1609/2HOBBY wrench also fits on the external centerlock disc nut.

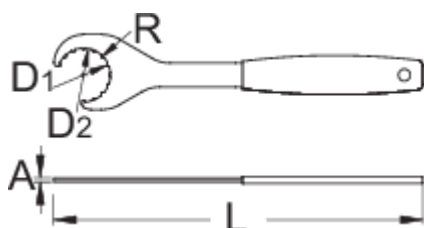

D1

D2

L

A

R





D1

D2

L

A

R



623424

21,35


22,5

310

3

1,5

205

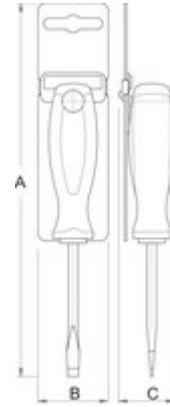

Retail packaging



MA

MB

MC




623424

370

63

9

280

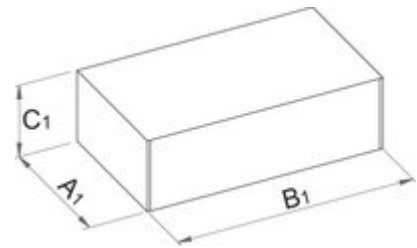

Transport packaging



TA

TB

TC



623424

4

114

388

47

1210